

# LEX55 Ex ec certified RTD for zone 2 and 22

## Construction

ATEX execution	II 3 G Ex ec IIC T6...T1 Gc
ATEX certification	DEKRA 18ATEX0024 X
IECEX execution	Ex ec IIC T6...T1 Gb
IECEX certification	IECEX DEK 17.0046X
Suitable for zone	2 and 22
Ingress protection	IP65 / IEC529
Ambient temp. range	Ambient temp. range -45°C...+80°C, this can be limited depending on the materials applied such as cables, connection heads, junction boxes.

## Connection Head

Model	DAN-AK (showed), other Ex certified connectionheads possible
Material	Aluminium, Stainless Steel or Plastic
Cable entry	M20x1.5 standard, other threads possible
Measuring insert	
Construction	Springloaded and replaceable
Springaction	>10mm standard, >40mm optional
Diameter	6.0mm standard, other diameters possible
Type	Mineral insulated (MgO)

## Sensor


Execution	Single or Duplex Pt100
Connection	3-wire standard, 4-wire optional
Accuracy	According IEC 60751 Cl. B, A or AA
Measuring range	-20°C...+400°C standard, -220°C...+600°C optional

## Extension

Type	Nipple - union - nipple standard, other constructions possible
Material	Stainless steel
Style / Connection	1/2"NPT standard, other threads possible
Length	150 mm standard, other lengths possible

## Notes

The LEX55 is the replacement for the LEX45 Ex nA  
This datasheet is purely indicative, build-up of model code may vary from this datasheet

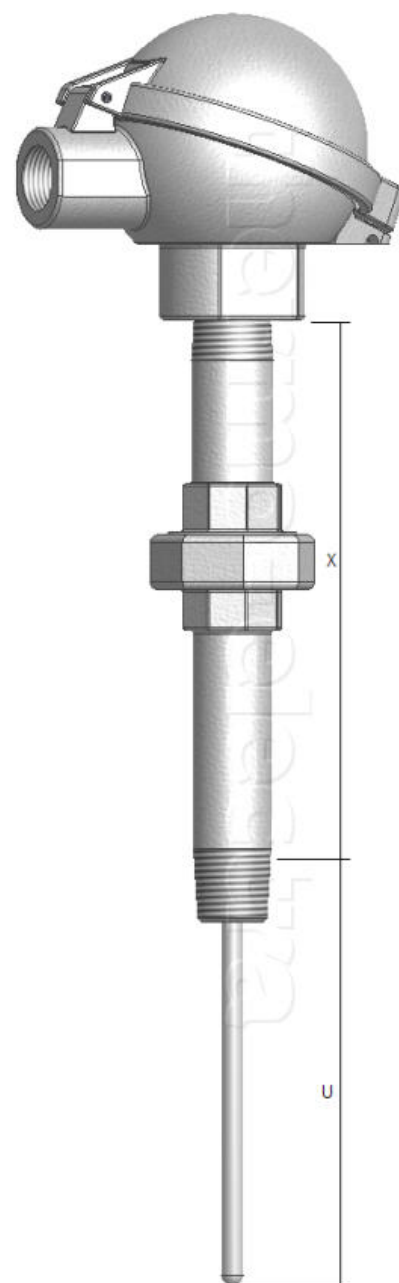

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	LEX55				
Sensor (S or D)					
Class B, A or AA					
Length "U" in mm					
Length "K" in mm					



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email [sales@thermo.nl](mailto:sales@thermo.nl)  
<http://www.thermo-electra.com>

