



# TE1134 Standard stripanel 3-pole

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| <b>Application</b>        |                                                          |
| Contacts                  | Springloaded contacts 3-poles, one ground                |
| Third contact             | Copper contact for drain/ground                          |
| <b>Number of circuits</b> |                                                          |
| Circuits                  | Available 2 to 12 circuits                               |
| <b>Temperature rating</b> |                                                          |
| Temperature limit         | Maximum 205°C ( 260°C intermittent )                     |
| High temperature version  | Maximum 425°C ( 540°C intermittent ), add leter H        |
| <b>Construction</b>       |                                                          |
| Body                      | Glass filled thermoplastic material                      |
| Design                    | Solid single piece, T-nut panel fastening from the front |
| Identified                | Scratchproof numbering                                   |
| <b>Dimensions</b>         |                                                          |
| Height                    | 57,2mm                                                   |
| Width                     | 19mm x number of circuits                                |

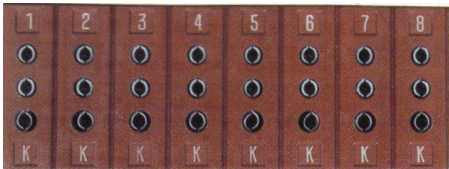

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

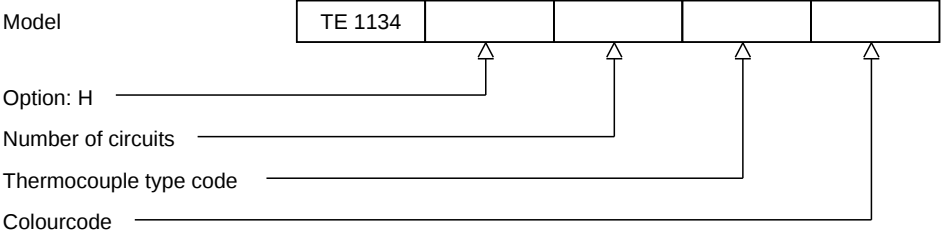

H9-2 Rev. 0 07/07