

TE1528V Miniature panel circuit Vertical



Application

Female multi panel	Thermocouple and RTD circuits
Contacts	Springloaded thermocouple contacts
Materials	Glass filled thermocouple body with original thermocouple material contacts
Front	Aluminium anodized for full corrosion protection
Circuits	6 max. standard, more possible on request

Temperature rating

Temperature limit	Maximum 220°C
--------------------------	---------------

Construction


Body	Glass filled thermoplastic material
Design	Stainless steel bracket mounted with 2 screws
Molded barriers	Prevent short circuit
Identified	Scratchproof numbering

Wire size

Accepts wires	From 0.2 mm to 2.0 mm
----------------------	-----------------------

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

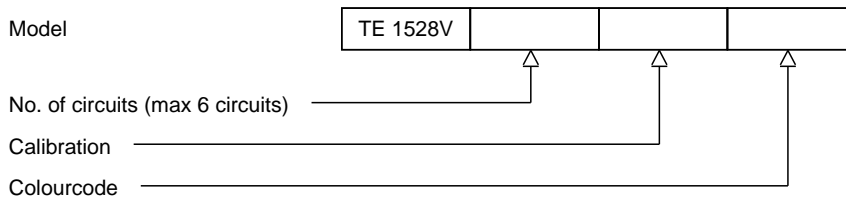

H9-2 Rev. 0 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

