


# TE1600 PCB printboard thermocouple socket

<b>Application</b>	
<b>Connector</b>	Thermocouple and RTD circuits
<b>Design</b>	For soldering onto printed circuit boards
<b>Materials</b>	Glass filled thermoplastic body with original thermocouple material contacts
<b>Soldering contacts</b>	Brass soldering contacts for soldering on the PCB
<b>Temperature rating</b>	
<b>Temperature limit</b>	Maximum 200°C
<b>Construction</b>	
<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Rugged one body design
<b>Molded barriers</b>	Prevent short circuit
<b>Versions</b>	
<b>Available versions</b>	Flat mounted (F)Rear connection (R)Square connection (S)
<b>Color code</b>	



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

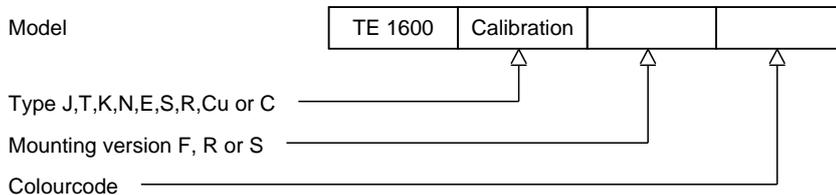

H9-1 Rev.0 7/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
<http://www.thermo-electra.com>

