



TE1034 Standard panel jack 3-pole with lugs

Application	
Female panel connector	Thermocouple and RTD circuits
Third connection	Third connection for ground, continuous shield or for three wire RTD.
Construction	
Contacts	Springloaded Cu, or thermocouple contacts
Materials	Glass filled thermoplastic body with original thermocouple material contacts
Temperature limit	Maximum 220°C
Body	Glass filled thermoplastic material
Molded barriers	Prevent short circuit
Wire size	From 0,2mm to 2,0mm.



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

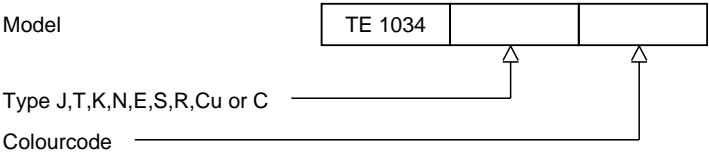

H9-2Rev.0 7/07