


TE1045 Standard panel jack with lugs

Application	
Female panel connector	Thermocouple and RTD circuits
Contacts	Springloaded thermocouple contacts
Materials	Glass filled thermoplastic body with original thermocouple material contacts
Temperature rating	
Temperature limit	Maximum 220°C
Construction	
Body	Glass filled thermoplastic material
Design	Stainless steel bracket mounted with 2 screws
Molded barriers	Prevent short circuit
Wire size	
Accepts wires	From 0,2mm. to 2,0mm.

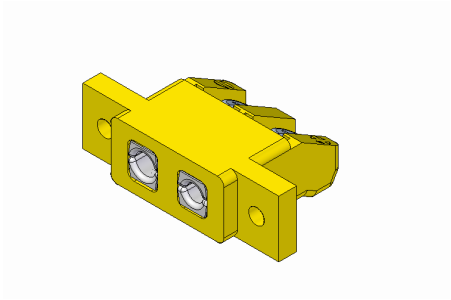

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

