



# TE1060C Standard plug ceramic up to 650°C



|                           |  |
|---------------------------|--|
| <b>Application</b>        |  |
| <b>Connector</b>          | Thermocouple and RTD circuits                        |
| <b>Contacts</b>           | Ensuring good contact even in demanding applications |
| <b>Materials</b>          | Ceramic with original thermocouple material pins     |
| <b>Temperature rating</b> |  |
| <b>Temperature limit</b>  | Maximum 650°C  |
| <b>Construction</b>       |  |
| <b>Body</b>               | High purity alumina body material                    |
| <b>Design</b>             | Cover with crews for quick wiring                    |
| <b>Molded barriers</b>    | Prevent short circuit                                |
| <b>Wire size</b>          |  |
| <b>Accepts wires</b>      | from 0,2 mm. to 2,0 mm.                              |
| <b>Cable diameter</b>     | Maximum 8,0 mm.                                      |
| <b>Color code</b>         |  |
| <b>Available colors</b>   | White only, thermocouple calibration by color dot    |

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

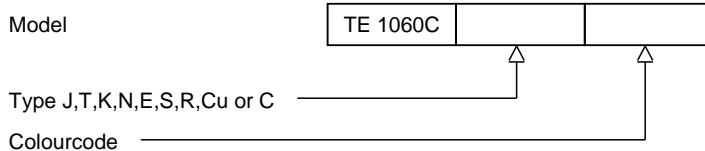

H9-1 Rev.0 7/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
<http://www.thermo-electra.com>

