


ME 7096 Bracket mounted surface thermocouple

Sheath	
Construction	Mineral insulated (MgO)
Material	Stainless steel 316 standard, other materials possible
Diameter	6.0mm standard, other diameters possible
Connection head	
Model	1088
Material	Stainless steel 316
Cable entry	M20x1.5, without cable gland
Thermo-element	
Calibration	K, T, J or N
Duplex	KK, TT, JJ or NN
Hot junction	Insulated
Accuracy	According IEC 60584
Material	Stainless steel 316 standard, other materials possible
Pipe clamp	
Mounting	Stainless steel pipe clamp
Tube diameter	2"
Head extension	
Material	Stainless steel
Length	To specify
Options	
Certification	ATEX or IECEx explosion proof certified Exe, Exi or Exd
Transmitter 4-20mA	In-Head transmitter, standard or Ex version. Please select from our standard range, see transmitterchapter, specify make, model and range.

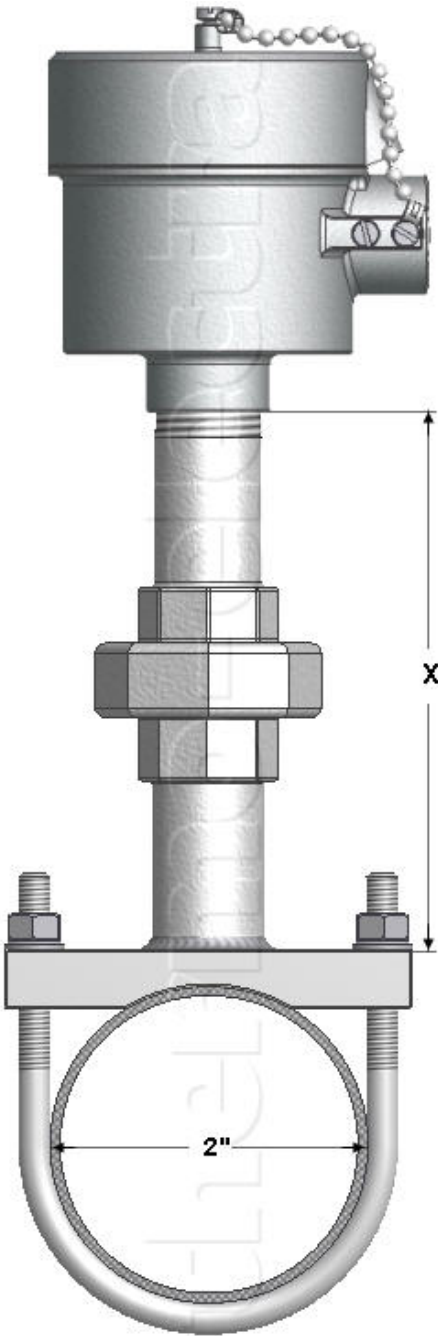

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	ME 7096		
Calibration			
Length "X" in mm			