

E60 Flexible PVC thermocouple extension cable -30°C to 85°C

Specifications

Insulation material	Each wire and overall jacket high quality extruded PVC
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Temperature limits	-30/+85°C

Conductors

Conductor type	Stranded
Conductor size	1.5 mm ² (48x0.2 mm)
Number of pairs	1, 2, 4, 6, 8 or 12 pairs
Pair identification	Each pair numbered, for multipair only


Calibration

Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	Conforms to IEC 60584 and ANSI MC 96.1
Colourcode	According thermocouple calibration IEC, ANSI, BS etc.

Number of pairs	1	2	4	6	8	12	Pair
Outside diameter	7.0	8.5	12.0	14.1	16.0	19.5	mm
Weight	100	120	185	305	455	710	kg/km

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

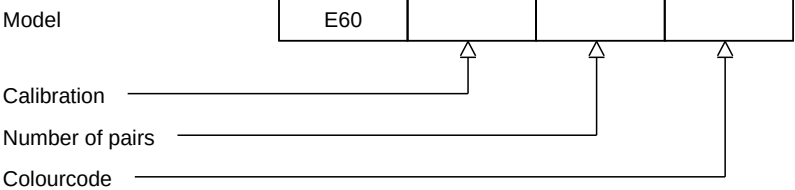

H8-1 Rev. 07/07