


DD 3020 Socket weld thermowell – tapered

Thermowell	
Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)
Stem / Shaft	
Wetted part	Tapered
Diameter	Root and tip diameter to specify, standard 25 to 20mm.
Insertion length	To specify
Bore Size	6.5 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm
Connection length	
Standard length	50mm
Female connection	
Threaded	1/2
Options	
Other materials and dimensions	
Plug and chain for test well	
Protective coating, PTFE, Halar, Stellite etc.	
Tagging	
Wake frequency calculation	

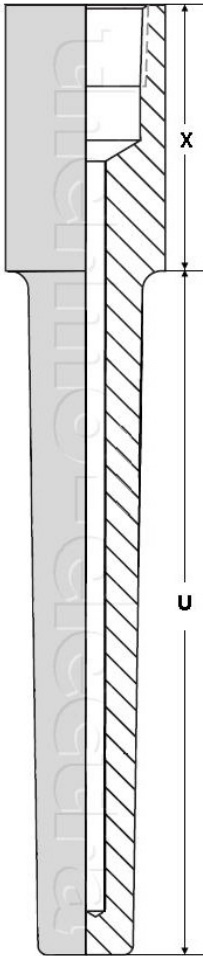

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DD 3020					
Diameter welding neck in mm						
Diameter root in mm						
Tip diameter in mm						
"U" length in mm						
"X" length in mm						

H3-1 Rev.0 7/07