


Sheath	
<b>Construction</b>	Bendable mineral insulated (MgO)
<b>Material</b>	SS316, SS310, SS446, Pyrosil D, Inconel600, Hasteloy X, Haynes HR160 or other materials possible
<b>Diameter</b>	6.0mm standard, other diameters possible
Extension cable	
	FEP/PFA with glassfiber insulated thermocouple cable
<b>Armour</b>	Stainless steel braided
Thermocouple	
<b>Calibration</b>	Single K, hot junction insulated, optional grounded
<b>Accuracy</b>	According IEC 60584
Welding Wedge	
<b>Dimensions</b>	Height 16mm, length 50mm standard, other dimensions possible
<b>Material</b>	Same as sheath
<b>Knife edge mounting</b>	Axial or radial, tube diameter to specify
Options	
<b>Retaining clips</b>	Weldable. Material same as sheath
<b>Heat shield</b>	Refrex braiding over the sheath length
<b>Radiation shield</b>	A weldable radiation shield
<b>Certification</b>	ATEX or IECEx explosion proof certified
<b>Expansion loops</b>	To specify



### Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

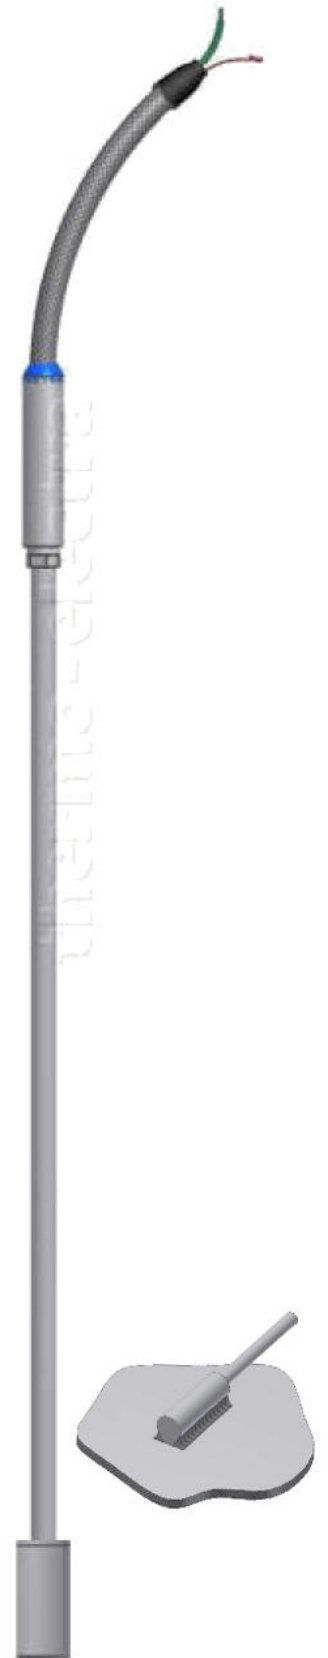