


DWK 6055 Vibration proof thermocouple

Design	Designed for use on combustion engines
Protection tube	
Construction	Barstock drilled
Material	SS 316 - (Wst 1.4401)
Insertion length "L"	Customer to specify, standard 150 mm
Diameter	Conical 18 to 12 mm
Process connection	1/2" BSP
Extention length "X"	Standard 50 mm
System	Springloaded insert
Lead wire	Heat and oil resistant armoured extension cable 250°C
Lead wire length "K"	Customer to specify, standard 1000mm
Thermocouple	
Sensor	K, J or L thermocouple, Customer to specify
Accuracy	According IEC 584-1
Hot junction	Insulated
Testing	Tested 500 Volt @ 20°C
Insulation	Minimum 100Mohm
Design	Vibrationproof
Temperature	800°C maximum

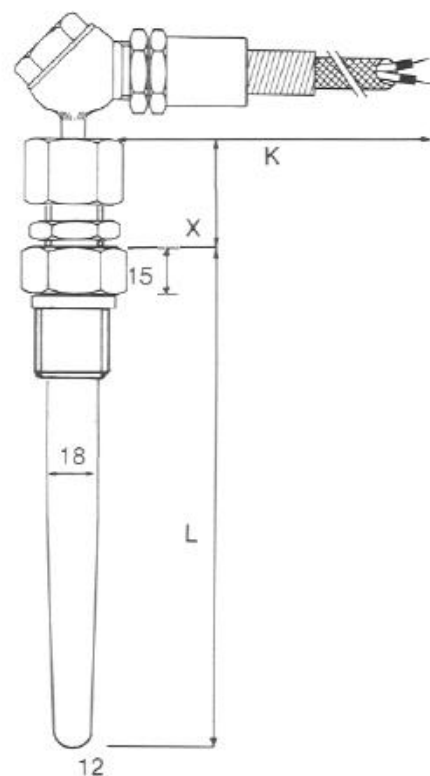

Ordering code				
*This datasheet is purely indicative, build-up of model code may vary from this datasheet.				
Model	DWK 6055			
Calibration				
Length "K" in mm				
Length "L" in mm				
Length "X" in mm				