

T00 PVC insulated twisted thermocouple wire -30°C to +105°C

Insulation material

Each wire high quality extruded PVC

Shape

Twisted pair

Moisture resistance

Good

Temperature limits

-30/+105°C

Conductors

Conductor type

Solid

Conductor sizes

0.5mm, 0.8mm or 1.0mm

Calibration

Thermocouple type

K, T, J, E, N, U or L

Accuracy

According IEC 60584 and ANSI MC 96.1


Colour code

According thermocouple calibration IEC, ANSI, BS etc.



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

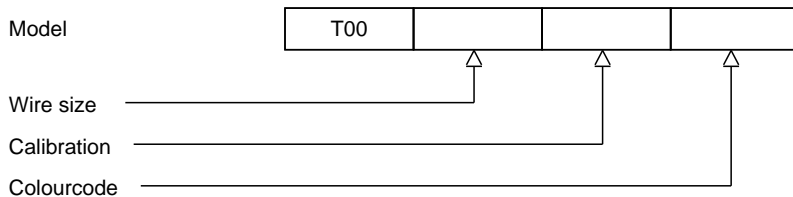

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

