DWR 6022 Vibrationsfeste Sensor

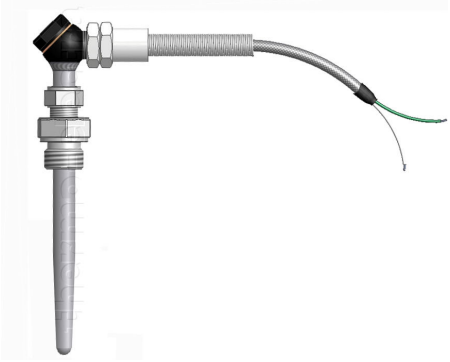

Design	
	Designed for use on combustion engines
Protection tube	
Construction	Closed-end tube
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	150mm standard, other lengths possible
Diameter	12mm tapered to 8.0mm standard, other dimensions possible
Process connection	1/2"BSP (1/2"), 1/2"NPT or other threads possible
Cable	
	Heat and oil resistant, armoured extension cable, 250°C
Cable length	1000mm standard, other lengths possible
Sensor	
	Single or Duplex Pt100
Style / Connection	3-wire system standard, 4-wire system optional
Accuracy	According IEC 60751 class B
Testing	Tested 200 Volt @ 20°C
Insulation	Minimum 100 M ohm
Design	Vibrationproof
Temperature	600°C maximum

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DWR 6022		

Length "L" in mm

Length "K" in mm

H6-1 Rev. 07/07

thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com