


HT 4080 Thermocouple for metal melting

Construction	
Protection tube	Closed-end tube, diameter depends on the dip- tube
Material	To suit application, select protectiontube material from below table
Insertion length	Customer to specify
Extension	
Material	Steel standard, other materials possible
Diameter	22x2.0mm standard, other diameters possible
Length	500mm standard, other lengths possible
Connection head	
Material	Aluminium or Stainless Steel
Cable entry	M20x1.5 standard, other threads possible
Thermocouple	
Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According to IEC 60584-1
Options	
Optional protection tube	Sapphire
Transmitter 4-20mA	In-Head transmitter, standard or Ex version. Please select from our standard range or specify your own standard
Swing-Cover head	DAN, transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H, transmitter in cover, insert with ceramic block

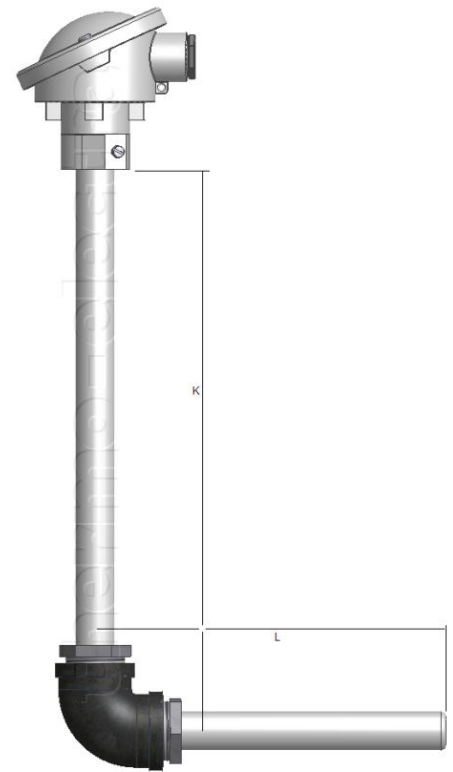

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	HT 4080			
Calibration				
Length "L" in mm				
Protectiontube Material Code Number				

H4-1 Rev. 07/07