



Needle

Construction	Closed-end sharp tip
Material	Stainless steel
Diameter	2.0 mm
Length L1 to Ln	Customer to specify Ln maximum 150 mm
Tip	Sharp for easy insertion

Lead wire

PVC insulated flexible thermocouple wire standard, other options possible

Lead wire length Customer to specify


Thermocouple

K, J or T

Temperature Maximum +220 °C

Numbers of sensors 4 maximum

Hot junction Ungrounded

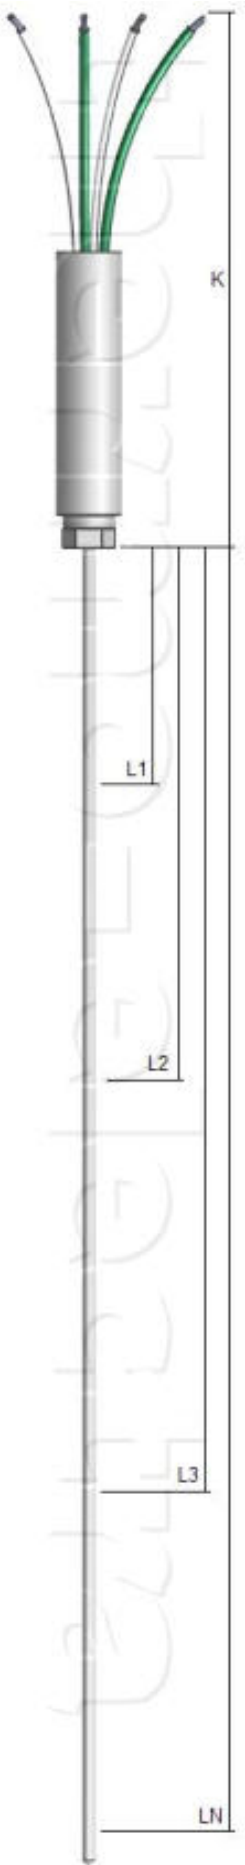

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	ML7070			
Calibration				
Length "K" in mm				
Length L1 to Ln in mm				

H7-1 Rev.1 07/07

