

# DWR 6090 Einstich-Widerstandsthermometer (USDA)

## Design

Designed for use on ships

## Type Approval

LLoyds Register Marine

## Category

LV2000 range

## Protection tube

### Material

SS 316 - ( Wst 1.4401 ) standard, other materials possible

### Tipdiameter

6.0mm standard, other diameters possible

### Tip

Sharp

## Cable

Rubber insulated flexible cable

### Cable length

7000mm standard, other lengths possible

## Sensor

Single or Duplex Pt100

### Style / Connection

3-wire system standard, 4-wire system optional

### Accuracy

According IEC 60751 class A

### USDA version

Tolerance:  $\pm 0.05^{\circ}\text{C}$  at  $0^{\circ}\text{C}$

### Range

$-30 / +60^{\circ}\text{C}$

### Testing

Tested 200 Volt @  $20^{\circ}\text{C}$

### Insulation

Minimum 100 Mohm

### Protection


IP 65

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

DWR 6090

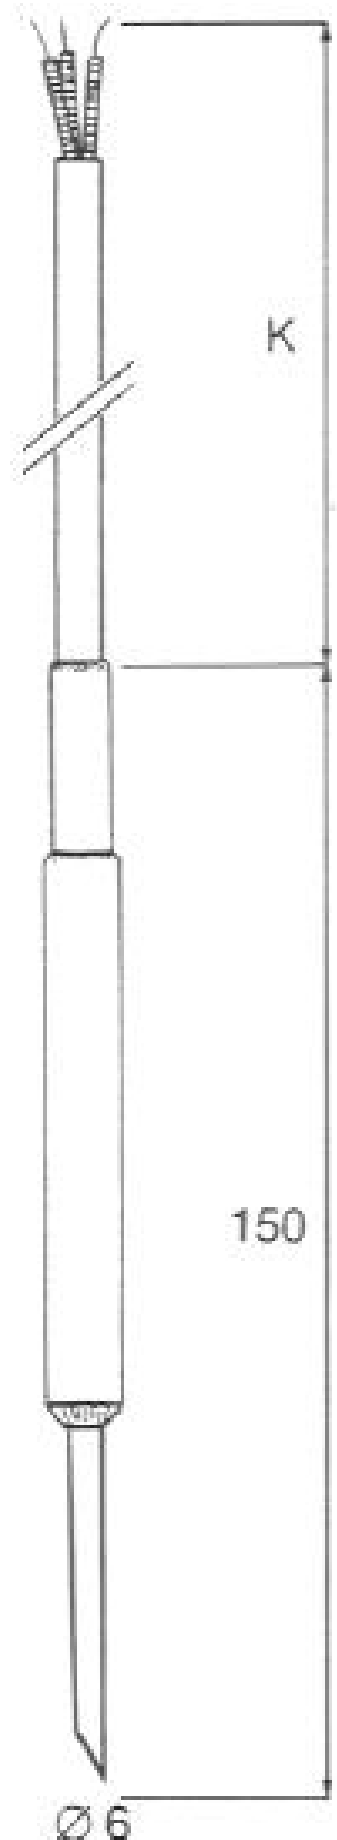

H6-1 Rev. 07/07