


DWR 6060 Bearing resistance thermometer

Design	Designed for use on ships
Type Approval	LLoyds Register Marine
Category	LV2000 range
Sheath	
Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Diameter	3.0mm standard, other diameters possible
Length	Customer to specify
Process connection	2 compression glands 1/4"BSP (G1/4") standard, other threads possible
Cable	
	Silicon insulated flexible cable, 240°C
Cable length	Customer to specify
Sensor	
	Single Pt100
Accuracy	According IEC 60751 class B
Style / Connection	3-wire system standard, 4-wire system optional
Range	-100 / +250°C
Testing	Tested 200 Volt @ 20°C
Insulation	Minimum 100 M ohm

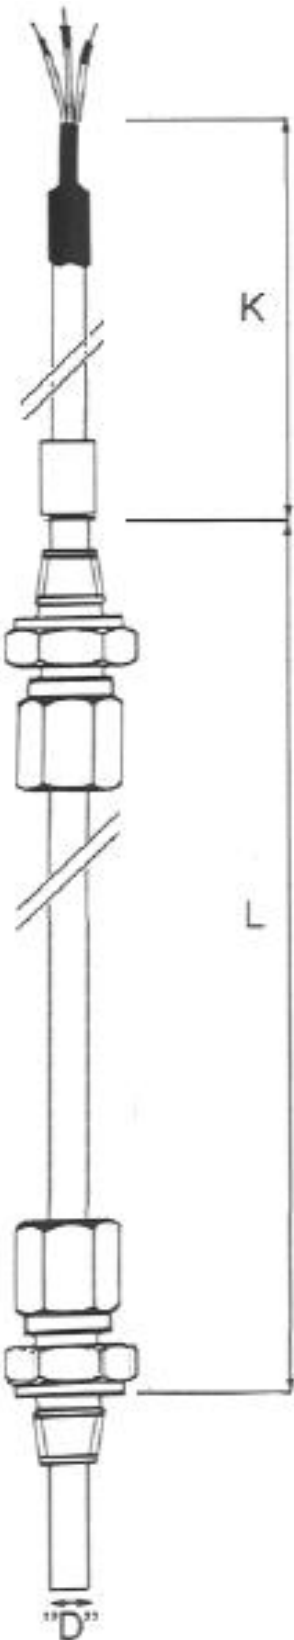

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DWR 6060		
Length "L" in mm		↑	↑
Length "K" in mm			↑

H6-1 Rev. 07/07