



TE1092 Cable Clamp

Application	
Application	Cable and Wire clampbracket will provide optimum strainrelief
Construction	Allows a large difference in maximum and minimum cable and wire diameters
Connectors	
Suitable for	This strain relief is designed to fit several type connectors. standard and high temperature connectors have the same mounting dimensions, other connectors such as ceramic or dual connectors have different dimensions, to specify when ordering
Material	
Screws and bracket	All Stainless Steel
Ordering	
Connector type	Mini (M), or Standard (S) to specify
Connector material	To fit:Standard and High temp(S), Ceramic (C), Dual standard (D) or Dual ceramic (DC), please specify
Options	
Options	Special U type brackets for dual standard connectors. Also crimp or solder inserts designed for soldering or crimping on mineral insulated cable or crimping on insulated wire are available



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

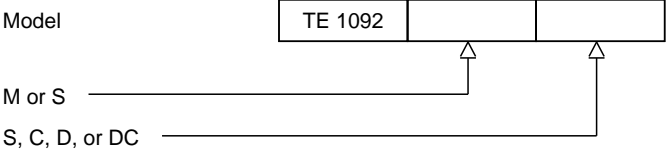

H9-1 Rev.0 7/07