

SW 3030 Threaded thermowell – straight

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Male threaded
Thread size	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
Material	SS 316 - (Wst 1.4401)

Stem / Shaft

Wetted part	Straight, see table
Insertion length	To specify
Bore Size	6.5 mm standard
Eccentricity	<1 micrometer
Bottom thickness	5 mm

Connection length

Standard length	50mm
Extended Hexagon	To specify


Female connection

Threaded	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
Other thread size	To specify

Options

- Other materials and dimensions
- Plug and chain for test wells
- Protective coating; PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

Proces connection	D1	HEX
1/2" NPT	16 mm	27 mm
3/4" NPT	18 mm	32 mm
1" NPT	20 mm	36 mm

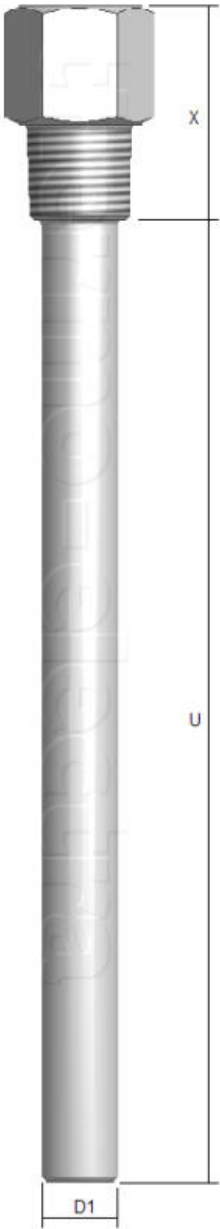

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	SW 3030			
Process connection				
"U" length in mm				
"X" length in mm				