


MI 2025 springloaded replacement resistance thermometer insert

Sheath	
Construction	Welded bottom
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	Customer to specify
Style / Connection	
Electrical	Cap type screws
Construction	Springloaded according
Sensor	
	Single or Duplex Pt100
Accuracy	According IEC 60751 Cl. B
Style / Connection	3-wire system standard, 4-wire system optional
Range	-220 / + 600 ° C
Insulation material	Mineral insulated (MgO)
Testing	Tested at 200 Volt / 20°C
Insulation resistance	Minimum 10 M ohm
Options	
Accuracy	Class B, A or AA
Style / Connection	2-wire or 4-wire
	2-wire with compensationloop
	Customer to specify separately

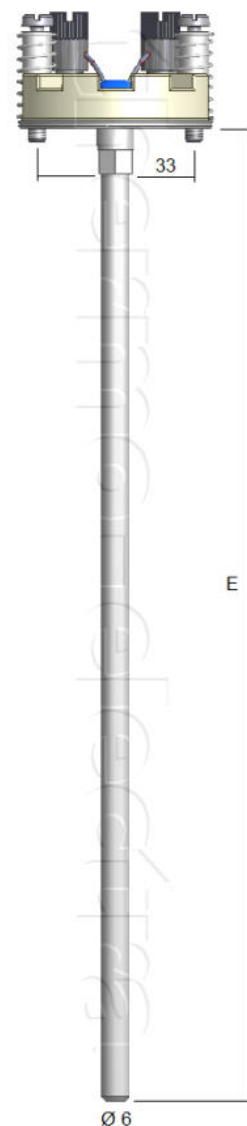

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	MI 2025		
Sensor (S or D)			
Length "E" in mm			