

ME 1056 Mineral insulated thermocouple with miniature jack

Sheath


Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) Also available in SS310, Inconel 600, Hasteloy X and Nicrosil D
Insulation	MgO
Diameter	Customer to specify
Length	Customer to specify

Style / Connection

Type	Miniature 2 pole jack, Model TE 1210
-------------	--------------------------------------


Thermocouple

Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 584-1 MC96.1
Hot junction	Insulated
Testing	Tested 500 Volt @ 20 °C
Insulation resistance	Minimum 100 M ohm
Available diameter	(0.25 - 0.5 - 1.0)* 2.0 - 3.0 - 3.2 Other diameters possible * single only

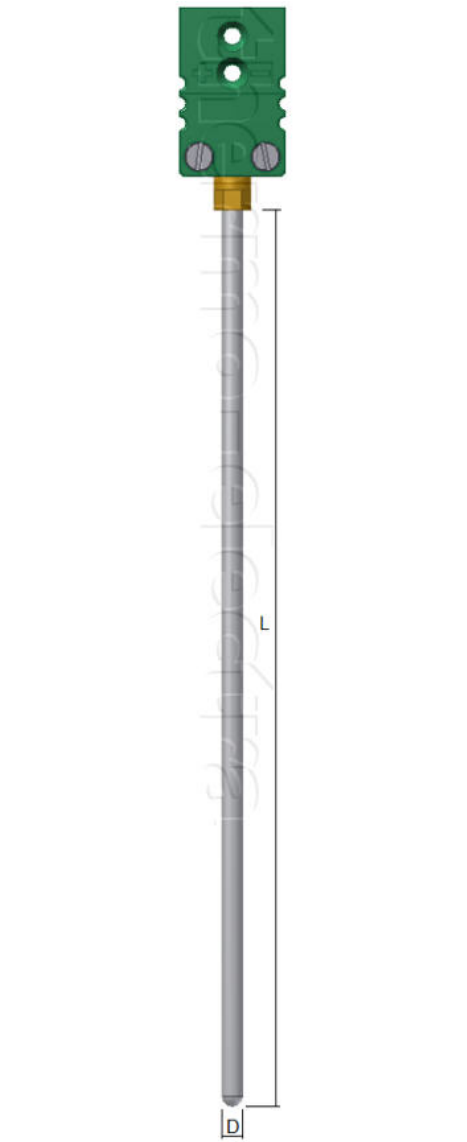

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

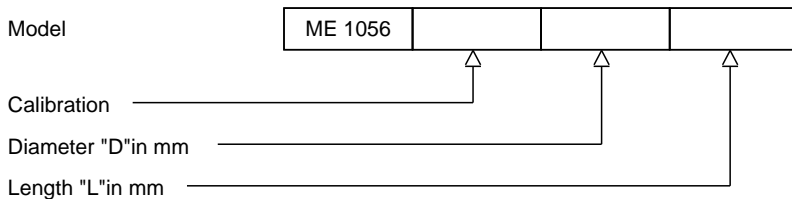

H1-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

