


TE1011 Standard jack 3-pole



Application

Connector Thermocouple and RTD circuits
Third contact for ground, shield or for three wire RTD's

Materials Glass filled thermoplastic body with original thermocouple material contacts

Temperature rating

Temperature limit Maximum 200°C

Construction

Insert Springloaded thermocouple alloy

Contacts Ensures good contact even in demanding application


Molded barriers Prevent short circuit

Wire size

Accepts wires From 0,2 mm. to 2,0 mm.

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

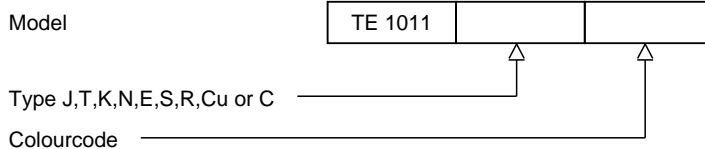

H9-1 Rev.0 7/07